

# RegO "NR" Series Noise Reduction Relief Valve

## Application

Designed especially for indoor applications such as laboratories where relief valve discharge noise is an issue. RegO's NR series PRV provides excellent flow characteristics with a 50% reduction in outlet noise related to valve relief.



## Features

- Packaged and cleaned for oxygen service per CGA G-4.1
- Bubble tight at 95% of set pressure
- 100% factory tested
- Repeatable performance
- Temperature range -320° to +165° F

## Materials

Spring ..... Steel  
Gasket ..... PTFE  
Body ..... Brass

**WARNING:** Inspection and maintenance of pressure relief valves is very important. Failure to properly inspect and maintain pressure relief valves could result in personal injuries or property damage. The useful safe service life of a pressure relief valve may be significantly affected by the service environment.

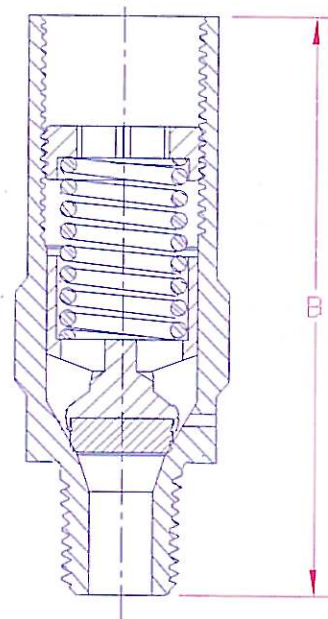

## Ordering Information

Part Number	Seat Material	Inlet Connections (F.NPT)	"B"	"C"	Orifice Size In	Factory Pressure Setting (PSIG)	Pipe-Away Adapter
NR009432F022	Fluorosilicone	1/4"	2.60"	3/8"	.062	22	B-9412-2
NR009432F050						50	
NR009432F100						100	
NR009432T230	230						
NR009432T250	250						
NR009432T300	300						
NR009432T350	350						
NR009432T360	360						